


# Ocean LED light/ Foco Ocean

Our **Ocean submersible LED light** is the result of our continuous search for excellence. High-performance LED with high light output, optional WHITE, RGB or RGBW, 10° or 30° optics, connector or 3 meters of cable included, depending on the version. Made of brass and AISI-304 stainless steel with extra-flat design, it's a robust, very light and **IP68 certified spotlight**. High heat dissipation, thanks to the large contact surface.

El **foco LED sumergible Ocean** es el resultado de nuestra continua búsqueda de la excelencia. LED de alto rendimiento y potencia lumínica alta, opcional RGB, RGBW, BLANCO, y ópticas 10° o 30°, conector o 3 metros de cable incluidos según versiones. Fabricado en Latón y Acero Inoxidable AISI-304, **diseño extraplano**, es un **foco robusto, muy ligero y certificado IP 68**. Alta disipación de calor, gracias a la gran superficie de contacto.

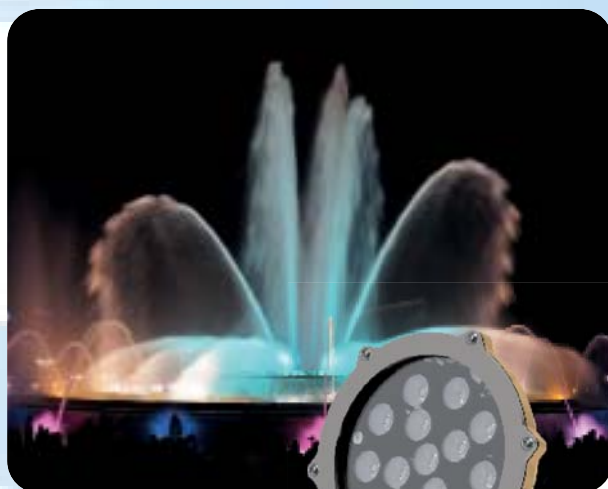

Certifications/ Certificaciones

IP68 CE

AISI 304

IN STOCK

LED




RGB

RGBW

PLC + HMI

PWM



Light charts/ Gráficos de iluminación.

Spot/ Intensivo (Beam 10°)							Flood/ Extensivo (Beam 30°)						
Color	250 RGB		500 White/ Blanco		750 RGBW		Color	250 RGB		500 White/ Blanco		750 RGBW	
Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	Distance/ Distancia	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro	Beam/ Haz de luz (m)	Centre/ Centro
1 m	Ø 0,18	12063 lx	Ø 0,22	16808 lx	Ø 0,20	13428 lx	1 m	Ø 0,51	6095 lx	Ø 0,54	10171 lx	Ø 0,53	9336 lx
2 m	Ø 0,36	3016 lx	Ø 0,42	4202 lx	Ø 0,39	3357 lx	2 m	Ø 0,99	1524 lx	Ø 1,06	2543 lx	Ø 1,02	2334 lx
3 m	Ø 0,52	1340 lx	Ø 0,60	1867 lx	Ø 0,55	1492 lx	3 m	Ø 1,44	677 lx	Ø 1,56	1130 lx	Ø 1,50	1037 lx
4 m	Ø 0,70	754 lx	Ø 0,81	1050 lx	Ø 0,74	839 lx	4 m	Ø 2,02	381 lx	Ø 2,11	636 lx	Ø 2,09	583 lx
5 m	Ø 0,87	482 lx	Ø 0,97	672 lx	Ø 0,92	537 lx	5 m	Ø 2,57	244 lx	Ø 2,64	407 lx	Ø 2,59	373 lx
6 m					Ø 1,07	373 lx	6 m					Ø 3,18	259 lx

Electrical data/ Datos eléctricos

Details/ Detalles

Reference/ Referencia	Model/ Modelo	Power/ Potencia	Voltage/ Voltaje	Beam angle/ Ángulo	Color/ Color	LEDs Num./ N° de LEDs	Lumens/ Lúmens	Life span/ Vida útil	Material/ Material	Weight/ Peso	Elect. connection/ Conexión eléctrica
F5225231	250	20 W	24V DC	10°	RGB	12	930 lm	40000/hrs	STAINLESS STEEL AISI-304 - BRASS/ ACERO INOXIDABLE AISI-304 - LATÓN	1,63 kg	Plug & Socket / Conector enchufable IP68 Connector H05RR-F/ H05RN-F H07RR-F/H07RN-F Ø 7 - Ø12
F5225242				30°			930 lm				
F5220202	500	36 W		10°	White 6500K		1524 lm				
F5220213				30°			1524 lm				
F5216218	750	36 W		10°	RGBW	14	2448 lm				
F5216229				30°			2448 lm				

Further information at [www.saferain.com](http://www.saferain.com) | Más información en [www.saferain.com](http://www.saferain.com)