

Lance Jet I/ Chorro Lanza I


This series is **the most widely used** in the world of water feature fountains. They are also fitted with one or two inner jet cut-offs that ensure the optimal quality of the water jet up to the heights shown on the technical data sheet. They also have a smooth ball joint that can reach a maximum slope of 20°, thereby enabling **parabolic jets to be designed with no additional parts**.

Esta serie es **las más usada** dentro del mundo de las fuentes ornamentales. Además están provistas de uno o dos cortachorros interiores que hacen que la calidad del chorro sea óptima hasta las alturas indicadas en la tabla técnica. También tienen una rótula de giro suave con la que se consigue una inclinación máxima de 20°, pudiendo hacer **chorros parabólicos sin necesidad de piezas adicionales**.

CHROME

ON STOCK

Brass/ Latón

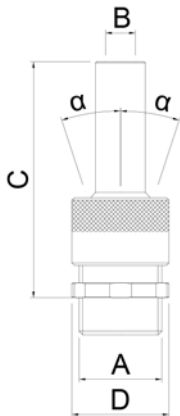

Water appearance/ Aspecto del agua


Wind resistance/ Resistencia al viento

Splash/ Salpicadura

Sound level/ Nivel de sonido

Visibility/ Visibilidad

Clear/ Cristalino



Nozzles/
Boquillas


Accessory/ Accesorio

Bubble level/ Nivel de burbujas

For nozzles between Ø4 and Ø19/

Para toberas entre Ø4 y Ø19

F2303807



Dimensions/ Dimensiones							Performance/ Rendimiento												
Reference/ Referencia	Connection/ Conexión A BSP-NPT	Outlet/Salida B (mm)	Length/ Long. Cx D (mm)	Straighteners/ Centradores	Angle/ Ángulo (α)	Weight/ Peso (kg)	Spray height/ Altura de chorro (m)	0,5	1,0	1,5	2,0	3,0	4,0	5,0	6,0	7,0	8,0	10,0	12,0
F2313832	G 3/8" M	Ø4	45 x Ø20	1	18º	0,05	l/min	2,3	3,3	4,3									
							m.c.a	0,7	1,5	2,2									
F2313865	G 3/8" M	Ø6	45 x Ø20	1	18º	0,05	l/min	5,0	7,2	9,0	10,5								
							m.c.a	0,6	1,1	1,6	2,2								
F2311233	G 1/2" M	Ø8	65 x Ø23	1	12º	0,10	l/min	12,0	14,0	16,0	20,0	25,0	29,0						
							m.c.a	0,5	1,0	1,6	2,1	3,4	4,5						
F2311266	G 1/2" M	Ø10	65 x Ø23	1	12º	0,08	l/min	15,0	22,0	27,0	31,0	39,0	45,0						
							m.c.a	0,5	1,1	1,7	2,3	3,6	4,9						
F2311031	G 1" M	Ø12	96 x Ø39	2	18º	0,34	l/min	19,0	30,0	37,0	43,0	51,0	60,0	68,0	76,0				
							m.c.a	0,6	1,3	2,0	2,6	3,8	5,0	6,4	8,0				
F2311064	G 1" M	Ø14	96 x Ø39	2	18º	0,33	l/min	26,0	41,0	49,0	56,0	72,0	84,0	92,0	100,0	107,0	114,0		
							m.c.a	0,7	1,4	2,1	2,8	4,2	6,2	7,5	8,4	9,2	10,1		
F2311536	G 1 ½" M	Ø16	142 x Ø55	2	20º	0,90	l/min	33,0	50,0	63,0	74,0	92,0	110,0	121,0	128,0	139,0	150,0	169,0	
							m.c.a	0,4	1,0	1,7	2,3	3,5	5,2	6,1	6,7	7,5	8,5	10,0	
F2311569	G 1 ½" M	Ø19	142 x Ø55	2	20º	0,87	l/min	46,0	70,0	89,0	104,0	130,0	144,0	159,0	176,0	188,0	202,0	231,0	261,0
							m.c.a	0,4	1,1	1,8	2,5	4,0	4,9	5,7	6,6	7,5	8,3	10,1	11,8