

PROFESSIONAL SUBMERSIBLE PUMPS/ BOMBAS SUMERGIBLES PROFESIONALES

With the professional series we want to cover the requirements of the most demanding water effects, offering nickel-chrome stainless steel submersible pumps with stainless steel support/filter, adjustable in height, adjustable leveling and with a sieve of 2.5mm in diameter, allowing both horizontal and vertical installation, ensuring an adequate correct installation and **great versatility**. The pumped water-cooled engine by sliding between the engine jacket and the outer jacket and the double seal on the shaft with intermediate oil chamber, ensure **great durability**. Optional reinforced winding . The SAFE RAIN professional series of submersible pumps for fountains provides specific solutions adapted to the requirements that ornamental fountains demand today.

Con la serie profesional queremos cubrir los requerimientos de los efectos de agua más exigentes, ofreciendo bombas sumergibles de acero inoxidable al níquel-cromo con soporte/filtro de acero inoxidable, regulable en altura, nivelación ajustable y con un tamiz de 2,5mm de diámetro, permitiendo instalación tanto horizontal como vertical, asegurando una adecuada fijación correcta instalación y **gran versatilidad**. El motor refrigerado por el agua bombeada al deslizarse entre la camisa del motor y la camisa externa y el doble sello en el eje con cámara de aceite intermedia, aseguran una **gran durabilidad**. Opcional devanado reforzado. La serie profesional de Bombas sumergibles para fuentes de SAFE RAIN aporta soluciones específicas y adaptadas a los requerimientos que las fuentes ornamentales demandan hoy en día.

Certifications/ Certificaciones

IP68 CE




ON STOCK

AINI 304



PROFESSIONAL SUBMERSIBLE PUMPS/ BOMBAS SUMERGIBLES PROFESIONALES


50Hz

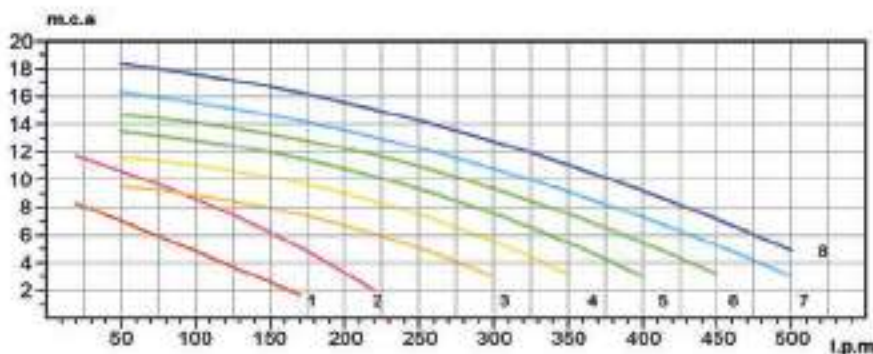

1. F6557174 / F6557376 (250W) 2. F6557196 / F6557398 (450W) 3. F6557117 / F6557319 (450W)
4. F6557128 / F6557321 (550W) 5. F6557139 / F6557331 (750W) 6. F6557141 / F6557343 (900W)
7. F6557151 / F6557354 (1100W) 8. F6557163 / F6557365 (1500W)

Measures/
Medidas

Vertical install./ Inst. Vert. Horizontal install./ Inst. Hor.

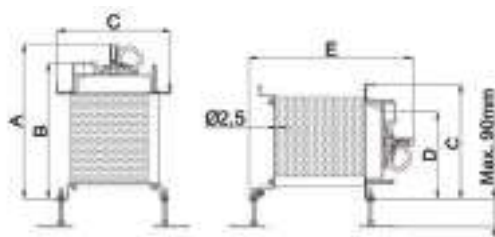

Reference/ Referencia	Power/ Potencia		Voltage/ Tensión	Cable length/ Long. Cable	Type o cable/ Tipo de cable	Cable section/ Sección de cable	Pump outlet/ Conexión bomba	Max. flow/ Caudal max.	Max. pressure/ Presión max.	A	B	C	D	E	Weight/ Peso						
	W	Hp	V/ Hz	m		mm ²	BSP-NPT	l.p.m.	m.c.a.	mm	mm	mm	mm	mm	kg						
F6557174	250	0,33	230/50	5	H05RN-F	3G 0,75	G1 1/4" F/H	170	8,3	306	260	254	183	336	8,8						
F6557376			3x400/50			4G 0,75									8,9						
F6557196	450	0,60	230/50			3G 1		220	11,7						342	305	254	183	372	10,8	
F6557398			3x400/50			4G 1														10,8	
F6557117	450	0,60	230/50	10	H07RN-F	3G 1	G1 1/2" F/H	300	9,5	400	350	306	232	430	13,2						
F6557319			3x400/50			4G 1									13,2						
F6557128	550	0,75	230/50			3G 1		350	11,6						415	365	306	232	445	17,5	
F6557321			3x400/50			4G 1														18,6	
F6557139	750	1,00	230/50			3G 1		400	13,5		440	390	306	232	470	18,8					
F6557331			3x400/50			4G 1										20,0					
F6557141	900	1,20	230/50			3G 1		450	14,7							460	410	306	232	470	18,9
F6557343			3x400/50			4G 1															20,8
F6557151	1100	1,50	230/50			3G 1,5		500	16,3		460	410	306	232	490						20,8
F6557354			3x400/50			4G 1															22,9
F6557163	1500	2,00	230/50			3G 2,5		500	18,4							460	410	306	232	490	22,3
F6557365			3x400/50			4G 1															25,8

Water pumps/
Bombas agua