


Wall bushing/ Pasamuros

Wall bushings are installed during the construction work. **The aim of the wall bushing is to allow cables to run safely from the external panel to the inside of the basin or fountain.** Once inside the basin of the architectural water feature, each cable is connected to complement (light, solenoid valve, etc.) or to a junction box. We have defined the following models, depending on the number of electrical cables and their diameter.


El pasamuros se empotra durante la obra civil. **La finalidad del pasamuros es la de hacer llegar los cables desde el cuadro exterior hasta el interior del vaso o pileta de forma segura.** Una vez dentro del vaso de la fuente ornamental cada cable se conecta a un receptor (foco, electroválvula, etc) o a su vez a una caja de conexiones. Dependiendo del número de mangueras eléctricas y de su diámetro hemos definido los siguientes modelos.



Model/ Modelo 1

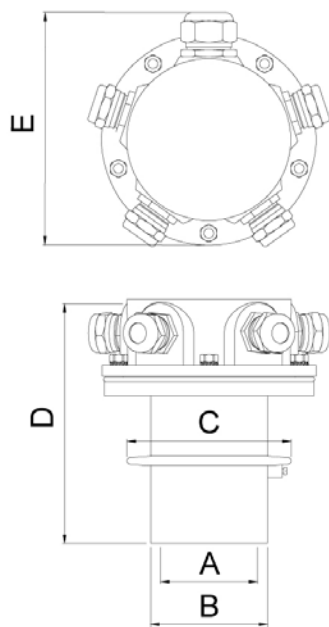

Model/ Modelo 2

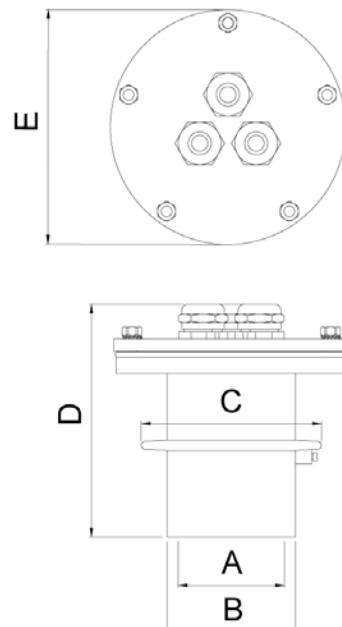

Reference/ Referencia	F6406931	F6414322	F6414333	F6414208	F6414219	F6405322	F6405614	F6415301
Model/ Modelo	1					2		
Material/ Material	Brass/ Latón							
Outlet No. and PG type/ Nº de salidas y Tipo de PG	4 PG16 1 PG 21	9 PG16 3 PG 21	6 PG16 6 PG 21	12 PG 21	19 PG 21	3 PG16	1 PG 21	7 PG 21
PG Material/ Material PG	Brass/ Latón							
Measure/ Medida A (mm)	G 2" F/ H	G 3" F/ H				G 2" F/ H		G 3" F/ H
Measure/ Medida B (mm)	Ø72	Ø96				Ø72		Ø96
Measure/ Medida C (mm)	Ø102	Ø126				Ø102		Ø126
Measure/ Medida D (mm)	150	186			206	128	133	163
Measure/ Medida E (mm)	Ø139	Ø252				Ø129		Ø252
Weight/ Peso (kg)	3	9,3			9,5	2,5		9,5