




Water curtain/ Cortina de agua

The out-flowing water runs continuously over the plastic sheet, which can even be fitted at an angle of 15° without the drop of water falling. A counterweight is fitted at the end of the plastic sheet so that the thread is taut at all times. It is **only used in indoor decorative fountains**, small installations or large shopping centres to decorate stairways or suchlike.


El agua se desliza por una lámina de plástico llegando incluso a poder colocar esta con una inclinación de 15° sin que la gota caiga. Al final de la lámina de plástico se coloca un contrapeso para que el hilo esté en todo momento tenso. **Únicamente se utiliza en fuentes de interior**, bien en pequeñas instalaciones o bien en grandes centros comerciales aprovechando huecos de escalera o similares.



ON STOCK

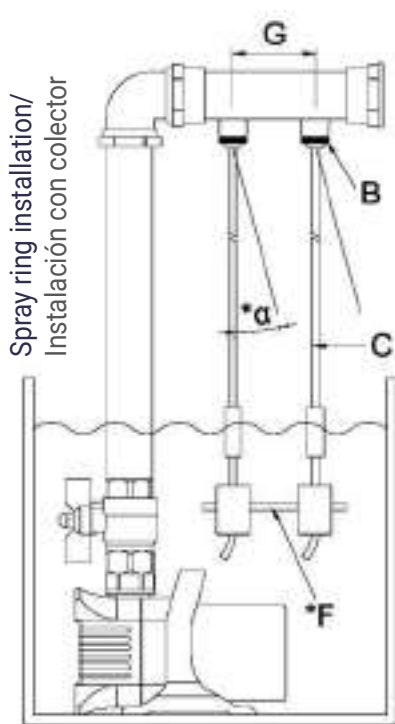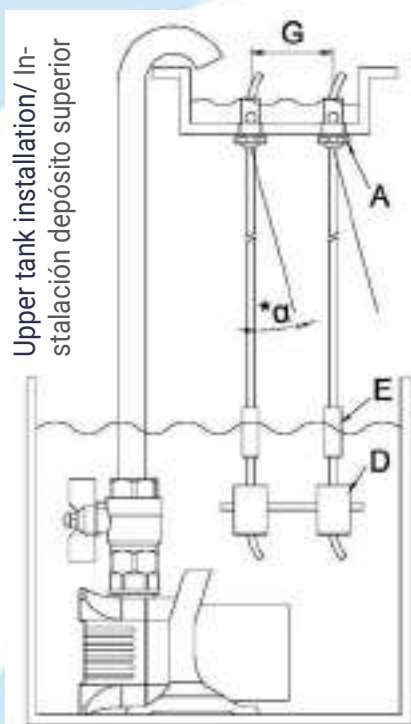

Assembly/ Montaje

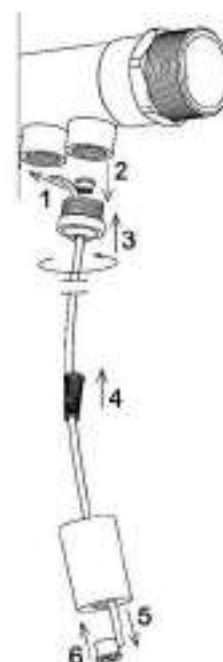

(*) α Max 15°. Use lace spacer/ Utilizar espaciador de hilo F

	Tank nozzle & Clunch cap/ Tobera para depósito & Tapón A	Spray ring nozzle & Clunch cap/ Boquilla para colector & Tapón B	Mylar lace roll/ Rollo hilo milar C	Counterweight & Clunch cap/ Contrapeso & Tapón D	Splash suppresor/ Antisalpica-dura E
Reference/ Referencia	F2720013	F2723804	F2720057	F2720024	F2720046
Dimensions/ Dimensiones	Flow/ Caudal 0,5 l/min		Lenght/ Longitud		
	Outlet Diameter/ Diametro salida Ø5 mm		50 m		
	Min. Distance/ Distancia min. G		Width and thickness/ Ancho y espesor		
	30 mm	25 mm	4,2 x 175 mic		